

全套提升和移动设备的相关产品
在质量、安全性及操作简便性方面有着无与伦比的优点


Related products for the whole set of lifting and moving equipment
In the quality, safety and ease of operation has an unparalleled advantage

经过多年来的不懈努力，今天，JNDO已经成为重型负载安全提升和移动行业的代名词中。在全球范围内，JNDO产品解决了大量的提升和移动问题。我们精通的专业知识和数十年的经验，得以在保证使用者和负载量最大安全性的基础上，针对每一客户，提供经济可行的选择方案。

我们设计和生产的提升和移动设备紧扣市场，可以满足各种不同场合的需要。即使在狭窄空间场合也可进行高精度的提升和移动设备。并可按客户要求定制更高吨位的提升和移动设备。

After years of unremitting efforts, today, JNDO has become synonymous with heavy load and improve safety in mobile industry. In the world Range, JNDO products to solve a large number of lifting and moving problem. Our expertise and decades of experience have been guaranteed. Based on the maximum security of the user and the load, to provide a feasible solution for each customer.

We design and manufacture of lifting and moving equipment can meet the needs of the market closely, different occasions. Even in the narrow space field High precision and mobile devices can also be improved. And can be customized according to customer requirements more high tonnage upgrade and mobile devices.

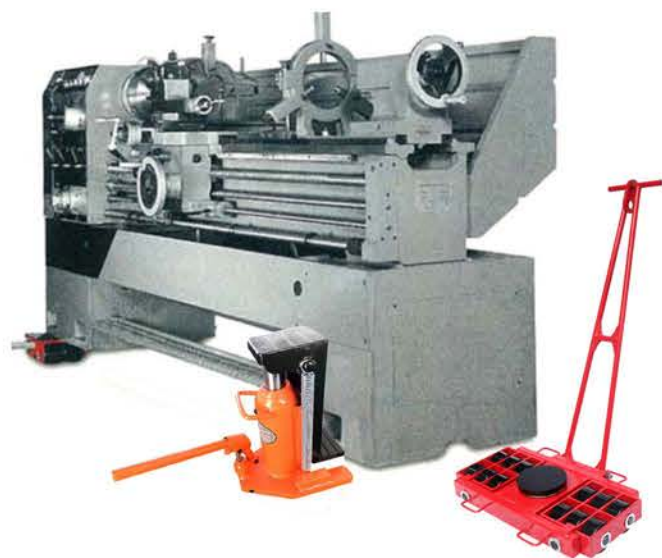

服务/检测标志/设计
Service / detection logo / design

所有JNDO产品均提供迅捷的维护和完善的备件服务。
All products are JNDO provide quick and perfect service spare parts maintenance.

所有JNDO产品均能持续达到较高的质量标准，每件产品出货前都要经过一系列的检测，然后提供一份检测报告并贴上标签。

All JNDO products can continue to meet the high standards of quality, and each product before shipment to through a series of tests, and then provide a test report and label.




● 常规产品质量保证为12个月 终生免费维修

Conventional product quality assurance for 12 months
Free maintenance for life


针对不同需要提升和移动的场合，JNDO设计部门都能为您量身定做一套简单易行的解决方案。

According to different needs of lifting and moving the occasions, JNDO design department can be tailor-made for you a set of simple solutions.

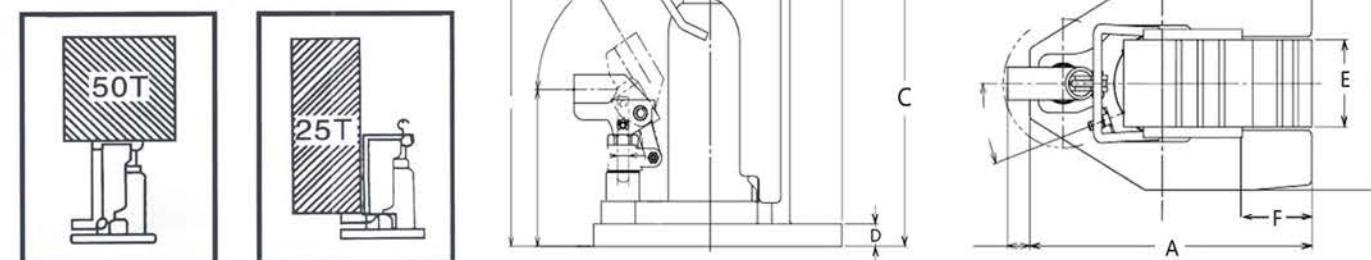液压爪式千斤顶
Hydraulic claw jack使用方法
Usage method

型 号 MODEL		MHC-2.5RS	MHC-5RS	MHC-10RS	MHC-15RS	MHC-25RS	MHC- 50RS
尺寸 (长A×宽B×高C) (mm) Dimensions (length x width x height)		210×140×232	260×200×283	295×220×322	305×255×350	340×285×350	570X440X430
爪D(最低位置) (mm) Claw (lowest position)		20	20	25	30	50	50
爪 宽 E (mm) Claw width E		65	100	115	130	130	220
爪 长 F (mm) Claw length F		45	50	55	60	65	80
扬 高 (mm) High Yang		115	148	158	158	150	150
额定载荷(T) Rated load	顶 部: Top	5	10	20	30	50	100
	爪 部: Pawl	2.5	5	10	15	25	50
重 量 (KG) Weight		11.5	24.5	37	56	76	189

电动爪式千斤顶 electric claw jack

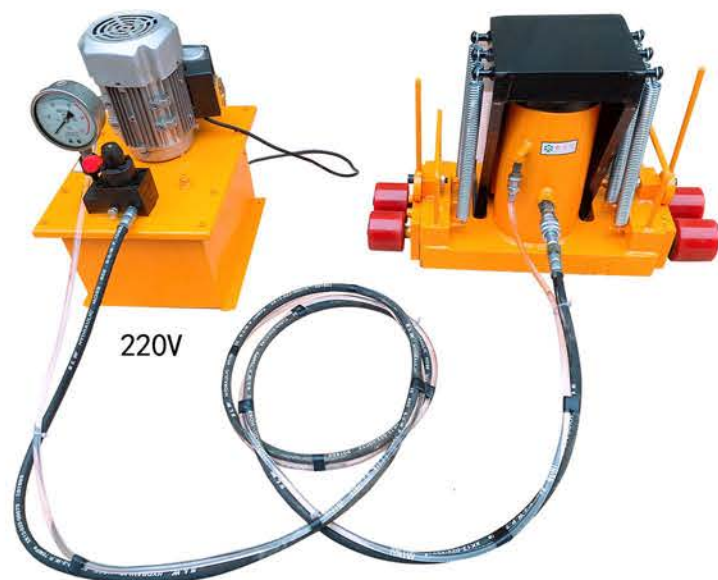

型 号 MODEL		MHC-40RS	MHC-50RS
尺寸(长Ax宽Bx高C) (mm) Dimensions (length x width x height)		260X520X400	300X660X400
爪D(最低位置) (mm) Claw (lowest position)		50	50
爪 宽 E (mm) Claw width E		180	180
爪 长 F (mm) Claw length F		80	100
扬 高 (mm) High Yang		150	150
额定载荷(T) Rated load	顶 部: Top	80	100
	爪 部: Pawl	40	50
重 量 (KG) Weight		165	207
油管总长 (cm) Tubing length (cm)		380	380

产品特点: 电动爪式千斤顶可单独使用, 也可两台或四台同时使用, 使货物能水平升降。操作简单、方便灵活等优点。

Product features: Electric claw jack can be used alone, or two or four jacks can be used at the same time, so that goods can rise and fall horizontally. It has the advantages of simple operation, convenience and flexibility.

可按客户要求定制各类非标千斤顶(电动爪式千斤顶、分离式千斤顶、超低或超高千斤顶等)

All kinds of non-standard jacks can be customized according to customer requirements (electric claw jacks, separate jacks, ultra-low or ultra-high jacks, etc.)

MHC系列油压爪式千斤顶简介

广泛适用于机械设备、桥梁建筑、铁路轨道等各方面的安装和维修; 交通运输的重物装卸; 汽车拖拉机修理等各方面。产品选用进口千斤顶, 采用优质钢材焊接热处理后, 具有结构简单、使用方便、坚固耐用、质量稳定上乘、安全可靠; 起顶两用、便于低位操作, 是一种用途广泛的起重工具。

Brief Introduction of MHC Series Oil Claw Jack

It is widely used in the installation and maintenance of machinery and equipment, bridge construction, railway track and other aspects, as well as the loading and unloading of heavy goods in transportation. Vehicle tractor repair and other aspects. The product adopts imported Jack and high quality steel after welding and heat treatment. It has simple structure. Easy to use, durable, stable quality, safe and reliable; dual-purpose lifting, easy to operate in low position, is a wide range of uses. Lifting tools.



操作手柄杆
长度1050mm
Handle lever
length 1050mm

CRA系列小坦克 (附转盘滚珠)

型 号 MODEL	CRA-4	CRA-6	CRA-8	CRA-9	CRA-12	CRA-16	CRA-20	CRA-25
尺寸(长×宽×高)(MM) Dimensions (length x width x height)	300x215x110	395x215x110	475x220x110	380x300x110	475x300x110	490x390x110	590x390x110	590x480x110
最大核载量 (T) Maximum nuclear load	6	8	12	15	18	24	30	36
正常核载量 (T) Normal nuclear load	4	6	8	9	12	16	20	25
轮子数量 (N) Number of wheels	4	6	8	9	12	16	20	25
产品重量 (KG) Product weight	13.5	20	27.5	28.5	37	52	68	82
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮


可根据不同环境使用不同轮子如钢轮、尼龙轮、防碎轮等, 根据客户要求定制超大吨位搬运小坦克。

According to different environments using different wheels, steel wheels, nylon wheels, anti broken wheels, etc., according to customer requirements for large tonnage handling small tanks.





使用示意图
Using the schematic diagram

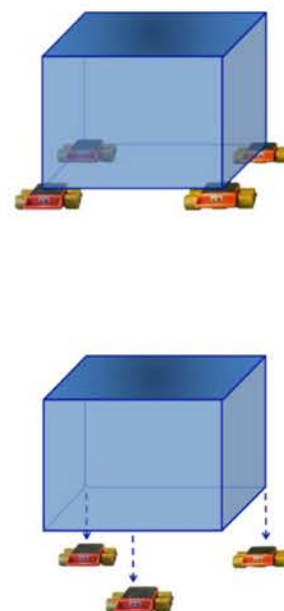

CRO系列搬运小坦克(无转盘及滚珠) CRO series of small tanks (no turntable and ball)


型 号 MODEL	CRO-4	CRO-6	CRO-8	CRO-9	CRO-12	CRO-16	CRO-20	CRO-25
尺寸(长×宽×高) (MM) Dimensions (length x width x height)	300x215x100	395x215x100	475x220x100	380x330x100	475x300x100	490x390x100	590x390x100	590x480x100
最大核载量 (T) Maximum nuclear load	6	8	12	15	18	24	30	36
正常核载量 (T) Normal nuclear load	4	6	8	9	12	16	20	25
轮子数量 (N) Number of wheels	4	6	8	9	12	16	20	25
产品重量 (KG) Product weight	12.5	18	26.5	27.5	36	49	59	79
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮

可根据不同环境使用不同轮子:如钢轮、尼龙轮、防碎轮等, 根据客户要求定制超大吨位搬运小坦克。

According to different environments using different wheels, steel wheels, nylon wheels, anti broken wheels, etc., according to customer requirements for large tonnage handling small tanks.



使用示意图
Using the schematic diagram

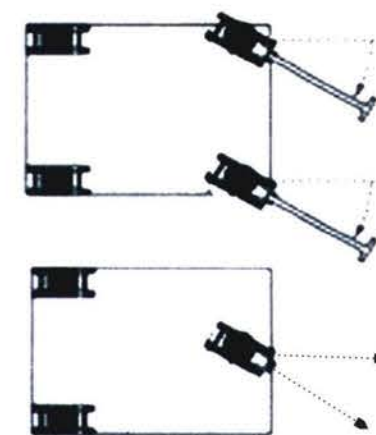

WA系列重型180度转向小坦克 WA series heavy duty 180 degree turn to small tank

型 号 MODEL	WA-6T	WA-8T	WA-12T	WA-18T	WA-24T	WA-30T
尺寸(长×宽×高) (MM) Dimensions (length x width x height)	385x265x110	440x265x110	550x275x110	590x320x110	680x410x110	770x410x110
最大核载量 (T) Maximum nuclear load	6	8	12	18	24	30
正常核载量 (T) Normal nuclear load	4	6	8	12	16	20
轮子数量 (N) Number of wheels	4	6	8	11	16	20
产品重量 (KG) Product weight	21	27	36	56	82	100
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮	PU轮	PU轮	PU轮
轮子尺寸 (MM) Wheel size	80x70	80x70	80x70	80x70	80x70	80x70

产品特长: 本产品为重型小坦克、载重量大, 转向灵活、操作安全方便等优点, 可根据客户要求定制超大吨位。

Specialty: This product is a small heavy tank, heavy load, flexible steering, safe and convenient operation. Advantages, can be customized according to customer requirements for large tonnage.

WQ系列180度转向小坦克

WQ series 180 degrees turn to small tanks



型 号 MODEL	WQ-6T	WQ-8T	WQ-12T
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	320×225×110	410×225×110	440×260×110
最大核载量 (T) Maximum nuclear load	6	8	12
正常核载量 (T) Normal nuclear load	4	6	8
轮子数量 (N) Number of wheels	4	6	8
产品重量 (KG) Product weight	13.5	19	27
轮子材质 (M) Wheel material	PU轮	PU轮	PU轮
轮子尺寸 (MM) Wheel size	80×70	80×70	80×70

产品特长：本产品重量轻、载重量大，转向灵活、操作安全方便等优点，可根据客户要求定制超大吨位。

Product specialty: This product is light in weight, heavy in weight, flexible in steering, safe and convenient in operation, etc. Advantages, can be customized according to customer requirements for large tonnage.

CRD系列手摇搬运小坦克


CRO series of manual handling of small tanks



型 号 MODEL	CRD-6	CRD-8	CRD-12	CRD-18
尺寸(长×宽×高) (MM) Dimensions (length × width × height)	350×400×110	460×400×110	560×400×110	560×400×110
最大核载量 (T) Maximum nuclear load	6	8	12	18
正常核载量 (T) Normal nuclear load	4	6	8	12
轮子数量 (N) Number of wheels	4	6	8	8
产品重量 (KG) Product weight	22.5	29	41.5	50
轮子材质 (M) Wheel material	尼龙轮	尼龙轮	尼龙轮	钢轮

产品特长：本产品带手摇装置，可以节省数倍人力，在没有外部动力牵引重物或者搬运人员太少、力量不够的情况下使用本产品可以移动重物。

Product specialty: This product with hand-operated device, can save several times of manpower, in the absence of external power traction This product can be used to move heavy objects when there are too few loaders or insufficient strength.

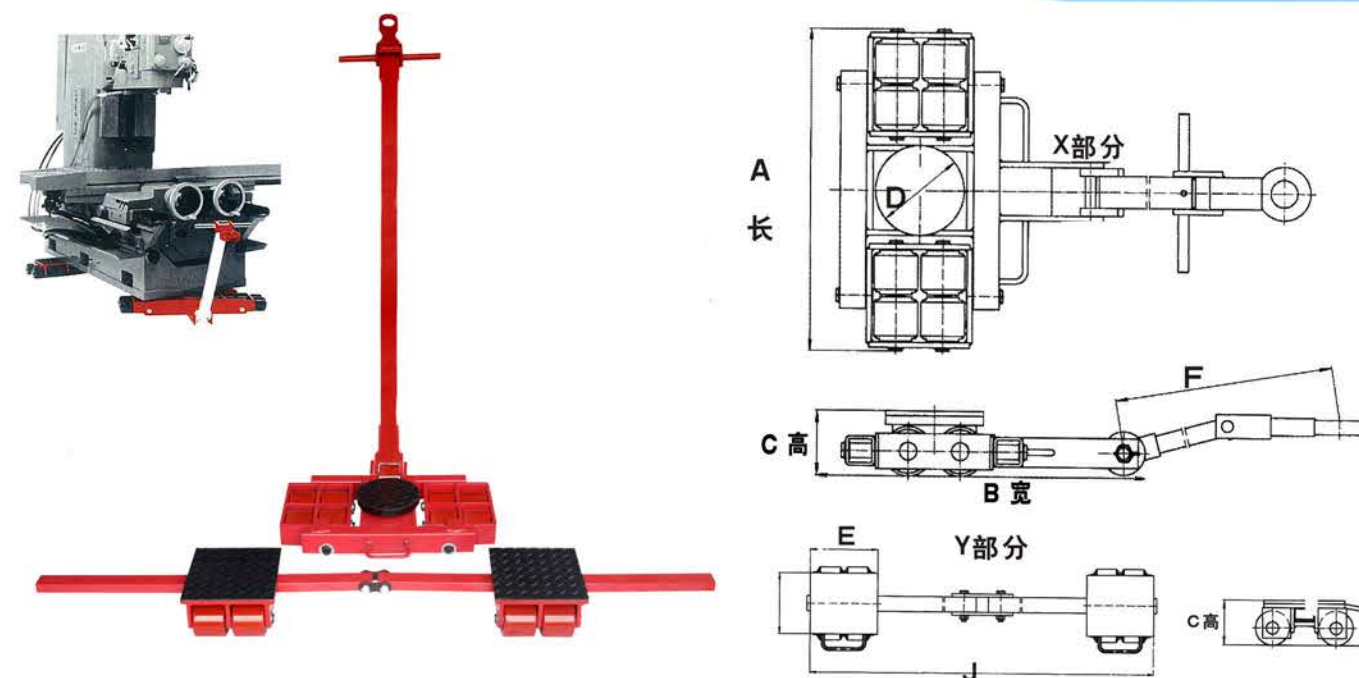

型 号 Model	轮子尺寸 (mm) Wheel size	轮子数量 (只) Number of wheels	接触面尺寸 (mm)D Contact surface size	手柄长度调节长度 (mm) Length of handle	外形尺寸 (mm) Dimensions (长×宽×高)	额定载重力 (T) Nominal load	净重 (kg) Net weight
X4+Y4	X4 Φ80×70	4	D:Φ160	F: 800	230×230×110	4	13
	Y4 Φ80×70	4	E:180×140	J:300-1000	180×140×110	4	15
X8+Y8	X8 Φ80×70	8	D:Φ160	F: 1400	580×410×110	8	43
	Y8 Φ80×70	8	E:200×160	J:400-1500	230×200×110	8	28
X12+Y12	X12 Φ80×70	12	D:Φ160	F: 1400	790×420×110	12	62
	Y12 Φ80×70	12	E:220×180	J:400-1500	300×230×110	12	38
X16+Y16	X16 Φ80×70	16	D:Φ200	F: 1400	1020×460×120	16	88
	Y16 Φ80×70	16	E:240×180	J:400-1500	385×240×120	16	53
X18+Y18	X18 Φ80×70	18	D:Φ200	F: 1400	830×590×120	18	96
	Y18 Φ80×70	18	E:280×200	J:400-1500	350×300×120	18	55
X24+Y24	X24 Φ80×70	24	D:Φ200	F: 1400	1020×600×120	24	115
	Y24 Φ80×70	24	E:350×220	J:400-1500	390×330×120	24	91
X32+Y32	X32 Φ80×70	32	D:Φ200	F: 1400	1020×700×140	32	175
	Y32 Φ80×70	32	E:440×220	J:400-1500	430×490×140	32	118

※本系列产品X型为前置移动工具，具有自动调节平衡功能，在高低不平场地也能走平稳。

并设计有手柄操作杆，简便，转向灵活。

※Y型为后置移动，可根据移动物的尺寸调节宽度。

※本系列产品轮子采用特殊材料制作，耐压、耐磨，不易损坏工作场地等。

※This series of products for the X type front moving tool, with automatic adjustment of balance function, in the uneven ground can go smoothly. And the design of the handle lever, simple and flexible.

※Type Y is a rear movement, which can be adjusted according to the size of the animal.

※This series of products are made of special materials, pressure, wear, not easy to damage the work site, etc..

使用示意图
Using the schematic diagram




Bk型部分：可根据移动物的尺寸调节宽度
Part BK: adjustable width of the size of the animal.

型 号 Model		轮子尺寸 (mm) Wheel size	轮子数量 (只) Number of wheels	接触面尺寸 (mm)D Contact surface size	手柄长度调节长度 (mm) Length of handle	外形尺寸 (mm) Dimensions (长×宽×高)	额定载重力 (T) Nominal load	净重 (kg) Net weight
AK8+BK8	Ak8	115×60	8	160	1400	600X520X140	12	75
	BK8	115×60	8	290x200	1500	325X200X140	12	51
AK12+BK12	Ak12	115×60	12	200	1400	780X520X140	18	95
	BK12	115×60	12	290x270	1500	325X270X140	18	70
AK16+BK16	Ak16	115×60	16	200	1400	970X680X145	24	180
	BK16	115×60	16	350x310	1500	350X310X145	24	105
AK24+BK24	Ak24	115×60	24	200	1400	1220X680X145	36	220
	BK24	115×60	24	450x350	1500	450X350X145	36	125
AK32+BK32	Ak32	115×60	32	200	1400	1460X680X145	48	240
	BK32	115×60	32	450x470	1500	450X470X145	48	148

本系列产品为：AK+BK重型组合式搬运小坦克，具有超强稳定性、持久、耐用、灵活方便等优点。

This series of products are: AK + BK heavy combined handling small tanks, with super stability, durability, durability. Flexibility and convenience.

360度万向小坦克
360 Degree Universal Tank


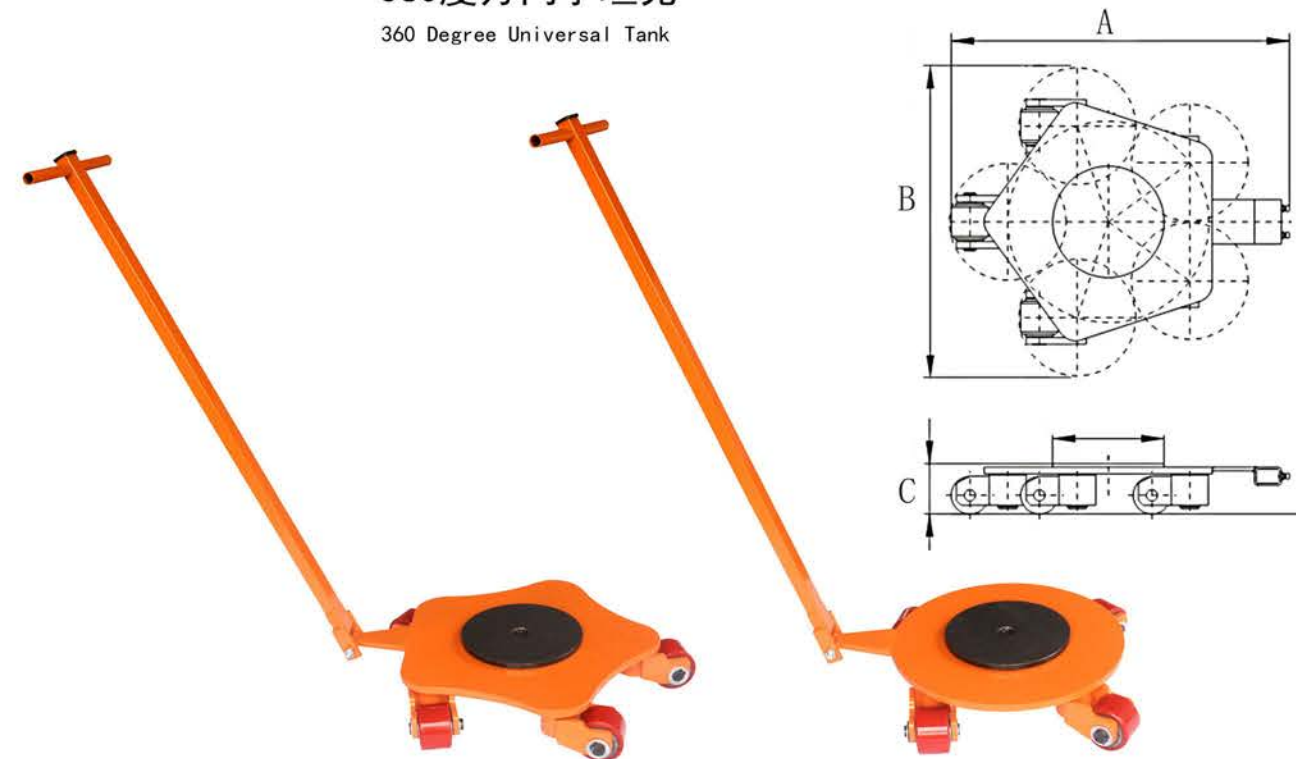


型号 MODEL	CRP-3	CRP-4	CRP-5	CRP-6	CRP-10	CRP-15	CRP-20	CRP-30
尺寸(长A×宽B×高C)(mm) Dimensions (length x width x height)	480x400x115	530x410x115	580x470x115	670x560x115	680x550x115	750x600x115	900x780x145	950x830x165
最大核载量 (T) Maximum nuclear load	3	4	5	6	10	15	20	30
正常核载量 (T) Normal nuclear load	2	3	4	5	8	12	16	25
轮子数量 Number of wheels	3	4	5	6	4	5	5	5
产品重量 (KG) Product weight	22	30	38	50	67	78	148	180
轮子材质+尺寸 (mm) Wheel material	PU轮80x55	PU轮80x55	PU轮80x55	PU轮80x55	合金钢轮80x70	合金钢轮80x70	合金钢轮100x100	合金钢轮120x100

产品特点：在狭窄的地方移动和旋转重型载荷，是万向小坦克的特有功能。特有的轴承结构，赋予万向小坦克360°任意旋转的功能。当重型负载数点支撑并合理分布载荷时，多台万向小坦克能同时使用。即使搬运重型负载，也具有非常好的灵活性。

Product features: Moving and rotating heavy loads in narrow areas are the special functions of small universal tanks. Unique bearingsThe structure gives the omnidirectional small tank the function of 360 degree arbitrary rotation. When the heavy load is supported by several points and the load is distributed reasonably, Several universal small tanks can be used at the same time. Even when handling heavy loads, it also has very good flexibility.

360度重型万向搬运小坦克 360 Degree Heavy Universal Handling Tank

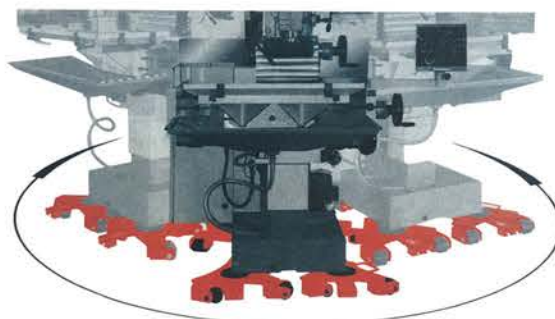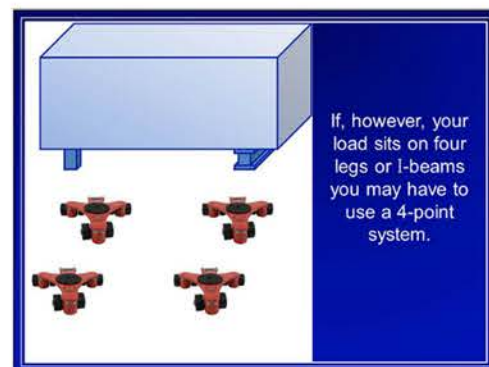

型 号 MODEL	CRQ-6	CRQ-8	CRQ-12	CRQ-16
尺寸(长A×宽B×高C) (mm) Dimensions (length x width x height)	670x520x165	810x520x165	810x520x165	930x640x165
正常核载量 (T) Normal nuclear load	8	12	18	24
轮子数量 Number of wheels	6	8	12	16
产品重量 (KG) Product weight	70	85	108	125
轮子材质 Wheel material	PU轮115x60	PU轮115x60	PU轮115x60	PU轮115x60

产品特点：每个搬运车可作360度自转，可按照实际载重进行多个连接使用，可与BK系列配套使用。本产品可有效保护地面，转向灵活，载重量大等优点。

Product features: Each carrier can rotate 360 degrees, according to the actual load. It can be used in conjunction with BK series. This product can effectively protect the ground, flexible steering, heavy load and other advantages.

使用示意图

Using the schematic diagram



规 格 Gauge	最大承载TON Maximum load bearing TON	长 MM (A) Long MM (A)	宽 MM (B) Wide MM (B)	高 MM (C) High MM (C)	总重量KG Total weight KG	侧板距离 (D) The distance (D)
CRM8	8	370	230	90	17	152
CRM10	10	400	230	90	20	152
CRM15	15	415	240	110	28	160
CRM20	20	450	240	110	30	160
CRM25	25	490	240	110	35	160
CRM30	30	530	300	140	60	205
CRM40	40	580	300	145	70	205
CRM50	50	625	300	150	80	230
CRM60	60	660	340	165	105	230
CRM80	80	710	340	170	120	250
CRM100	100	760	340	175	135	250
CRM120	120	870	365	190	180	250
CRM150	150	930	365	195	200	278
CRM200	200	920	393	220	230	278
CRM250	250	990	393	225	260	288
CRM300	300	1060	393	230	290	288
CRM350	350	1190	423	255	400	300
CRM400	400	1270	423	260	440	300
CRM450	450	1355	423	265	490	320
CRM500	500	1440	423	270	530	320


※特点：一般适用于槽钢、钢板等直行使用，具有超强稳定、持久耐用。工字钢、槽钢等直行牵引上使用。可根据客户要求和尺寸定制各类履带式搬运坦克车。

※注意：直行小坦克，请勿转向。

※ Features: generally applicable to steel and steel plate, straight, strong, stable and durable. Steel I-beam, straight line traction on the use of. Can be customized according to customer requirements and size of various types of crawler trucks.

※Note: do not turn on the small tank.

组合履带式搬运小坦克
Combined Tracked Handling Tank

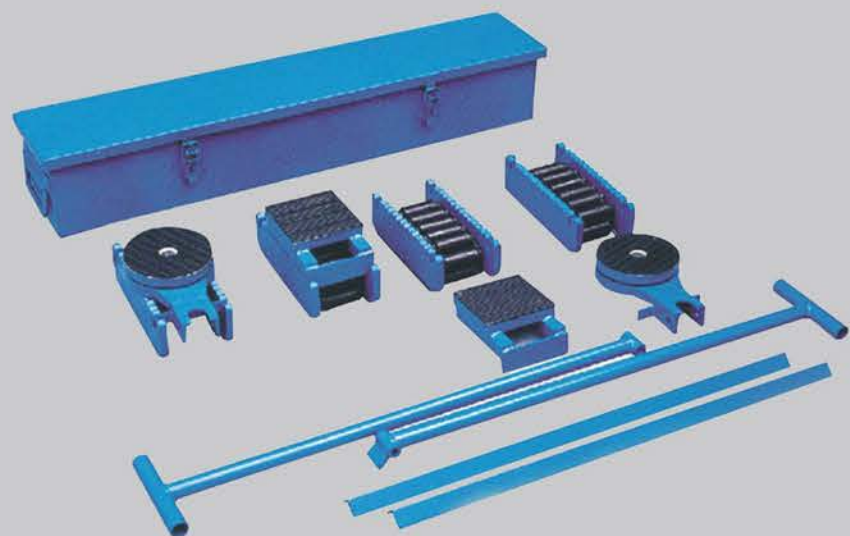


- * 所有的额定载荷的计算，都是基于在能承受住滚柱链压力钢质表面的使用工况。为安全起见，全套小坦克的额定载荷是根据2组小坦克在不平表面所能承受住的最大负荷而计算的；
- * 对于货物搬运的安全至关重要是导轨面，而不是滑轮的额定载荷。不适合搬运陶瓷等易碎物品。禁止在沥青和混凝土地面上使用，若需在此工况下使用，建议先垫一块厚度至少为10毫米的钢板；
- * 由于只需很小的力就能克服滚动摩擦（总载荷的4-7%）。故若要在斜坡上使用履带式搬运小坦克时，必须做好预防措施。

- * All maximum carrying capacity are based for use on a steel surface, which with stands the pressure of the chain-roller,for safety,the carrying capacities in complete sets are calculated so that 2 transport trolleys could support the full load on uneven surfaces.
- * The track surface is important for the safe transportation of the load,not the carrying capacity of the Roller Transport Trolleys are unsuitable.Movement on torment on tarmac and concrete is restricted.In these cases it is recommended to put a steel plate of a minimum of a 10mm thickness underneath.
- * Due to the little effort required to overcome the rolling resistance (4-7% of the total load) precautionary measure must be taken for use on inclined surfaces.

CRS组合履带式搬运小坦克
CRS Combined Tracked Handling Tank

- * 包括4组小坦克、2个转盘、2块垫板、2根操纵手柄、2根连接条、1只铁箱。
- * Including four transport trolleys , two turntables,two packing plates,two steering handles,two link-up bars, one metal box.
- * 适用于设备的短途搬运。
- * 适用于安装作业和重载荷的搬运。
- * 操纵手柄可准确控制，便于大型设备搬运和狭窄区域的使用。行进速度不得超过 5 米/分钟。
- * 最小转向直径为3米
- * For short, variable transportation distances.
- * For installation works and movement of heavy loads.
- * The steering handle give you precise control making it easy to manoeuvre large machinery or into tight areas.
- * Moving speed no exceeding 5m/min.
- * Minimum turning circle is 3m.

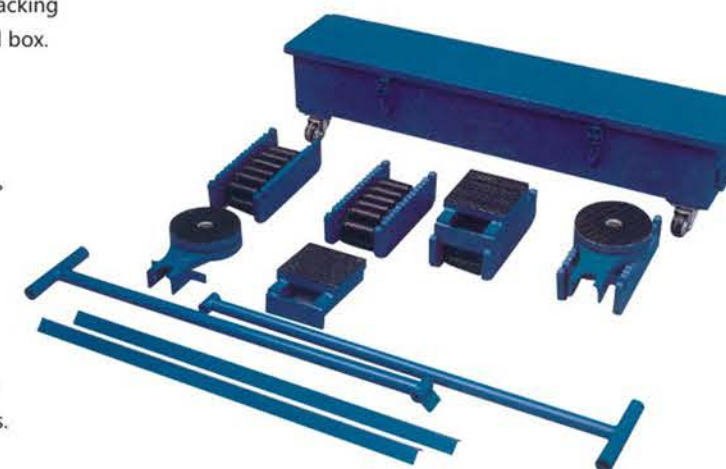

型 号 Model	CRS-20	CRS-30	CRS-60	CRS-80
额定载荷 (t) Capacity	20	30	60	80
承载面长度 (mm) Length Support	150	150	205	250
承载面宽度 (mm) Width Support	130	130	190	230
长x宽x高 (mm) Long x wide x high (mm)	270x152x120	320x152x120	440x205x150	530x250x180
滚柱直径 (mm) Roller Dia.	24	24	29	39
转盘直径 (mm) Swivel Top	150	150	200	250
整套重量 (kg) Weight of Set	52	60	112	212

可根据客户要求定制各类
履带式搬运小坦克


Customized according to customer
requirementsTracked Handling Tank



CRB系列履带式搬运小坦克
CRB Series Tracked Handling Tank

规格 Gauge	最大承载TON Maximum load bearing TON	长MM Long MM (A)	宽MM Wide MM (B)	高MM High MM (C)	总重量KG Total weight KG	侧板距离MM The distance MM (V)
CRB-10	10	250	312	90	20	152
CRB-20	20	330	320	90	30	160
CRB-40	40	420	365	145	70	205
CRB-60	60	450	390	165	95	230
CRB-80	80	480	410	170	110	250
CRB-100	100	540	410	170	125	250
CRB-150	150	700	438	195	180	278
CRB-200	200	700	438	195	215	278
CRB-300	300	840	458	230	270	298

产品示意图
Product sketch map

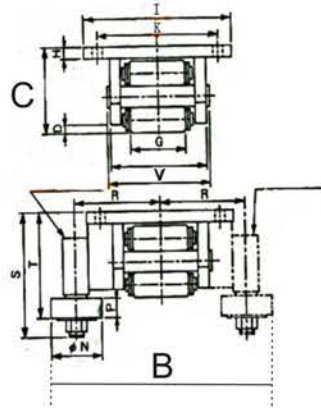

本产品可双向使用，一般适用于方钢、工字钢等，用于承重轨道。
如：地面使用把导向轮拆下即可！
注：严禁转向使用。
可根据客户要求和尺寸定制各类履带式搬运小坦克。
This product can be used in two directions, generally applicable to square steel, I-beam steel, etc. Used for load-bearing track. Such as: the ground use of the guide wheel can be removed! Note: Turning to use is strictly prohibited. All kinds of crawler-type small tanks can be customized according to customer requirements and sizes.

CRF越障碍式搬运小坦克
CRF more obstacles to carry small tanks



型号 MODEL	CRF-4	CRF-6	CRF-8	CRF-12	CRF-16
尺寸(长×宽×高) (mm) Dimensions (length × width × height)	410X285X120	410X395X120	650X285X120	650X410X125	650X530X125
最大核载量 (T) Maximum nuclear load	6	8	12	18	24
正常核载量 (T) Normal nuclear load	4	6	8	12	16
过障碍特能力 (mm) This product has been met with obstacles	20	20	20	20	20
产品重量 (KG) Product weight	28	35	52	73	95
轮子数量 Number of wheels	4	6	8	12	16
轮子材质与尺寸mm Wheel Material and Size mm	PU轮80x70	PU轮80x70	PU轮80x70	PU轮80x70	PU轮80x70

产品特点：本产品轮子遇到障碍物自动越过，坑凹处能自动下降，轮子高低能自动调节，能克服普通搬运车弱点，更轻松方便！

Product Features: This product wheels encounter obstacles Automatic crossing, pit can automatically fall, wheel The sub-level can be adjusted automatically to overcome common handling. Transport weakness, more easy and convenient!

可根据不同环境使用不同轮子：如合金钢轮、尼龙轮、防碎轮等
可根据客户要求定制超大吨位搬运小坦克

Different wheels can be used according to different environments: e.g. Alloy steel wheel, nylon wheel, crushing wheel, etc. Customized large tonnage handling according to customer requirements Small tank



CRK系列履带式搬运小坦克
CRK Series Tracked Handling Tank

规格 Gauge	最大承载TON Maximum load bearing TON	长MM Long MM (A)	宽MM Wide MM (B)	高MM High MM (C)	总重量KG Total weight KG (D)
CRK20	20	400	360	90	33
CRK40	40	450	360	90	50
CRK60	60	530	485	140	100
CRK100	100	660	550	165	170
CRK150	150	710	560	170	190
CRK200	200	760	560	175	205
CRK300	300	930	616	195	350
CRK400	400	930	616	195	390

产品特点：
本产品适用于平面、钢板等无轨道搬运工具，具有超强稳定性、持久耐用、安全便捷等优点。

Product characteristics:
This product is suitable for flat, steel plate, etc. Trackless Handling Tool, Super Powerful Stability, durability, safety and convenience Advantages.

CRX系列转向搬运小坦克
CRX Series Steering and Handling Small Tanks


型号 MODEL	CRX-6	CRX-8	CRX-12
尺寸(长×宽×高) (mm) Dimensions (length × width × height)	420X320X110	460X450X110	610X480X110
最大核载量 (T) Maximum nuclear load	6	8	12
正常核载量 (T) Normal nuclear load	4	6	8
产品重量 (KG) Product weight	28	35	52
轮子数量 Number of wheels	4	6	8
轮子材质与尺寸 Wheel Material and Size mm	PU轮80x70	PU轮80x70	PU轮80x70



产品特点：
本产品为组合转向，可在极小的空间内自由转向。具有超强的稳定性，安全可靠等优点。

Product characteristics:
This product is a combination steering, which can be freely steered in a very small space. It has the advantages of super stability, safety and reliability.


使用示意图
Use schematic diagram

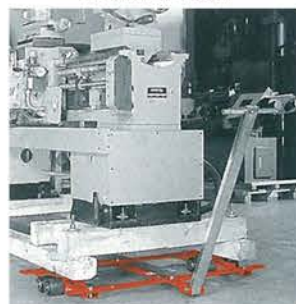


型号: CRY-8
Model: CRY-8




CRY双列式搬运小坦克
CRY Dual Tank Handling

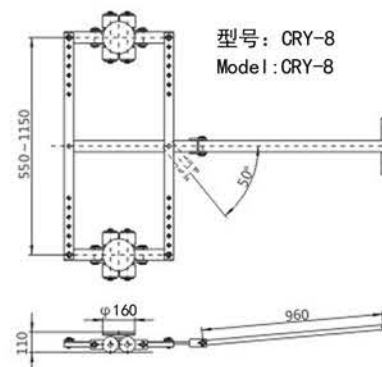

型号: CRY-8
Model: CRY-8

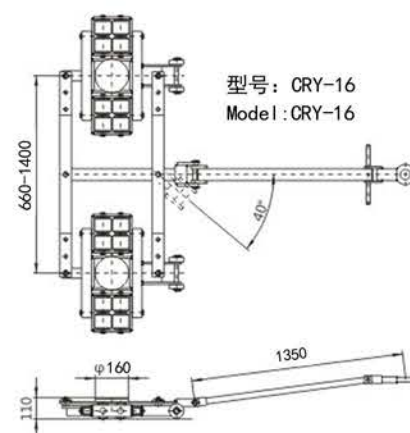

型号: CRY-16
Model: CRY-16

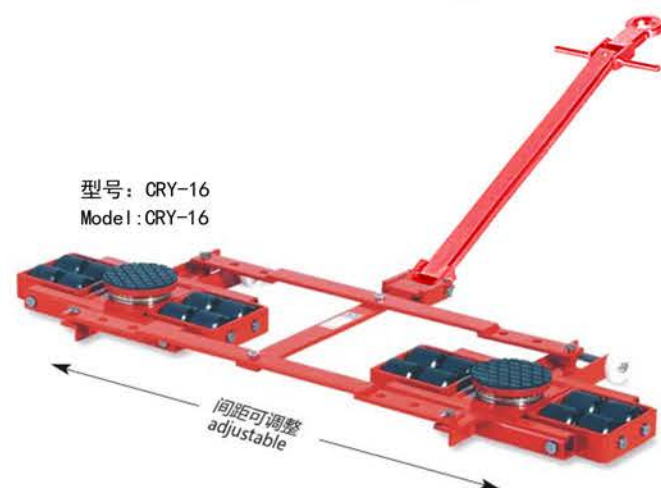

型号: CRY-16
Model: CRY-16

- * 双列式搬运小坦克，能安全而灵活地搬运重型负载。
- * CRY系列拥有第二根方向操纵手柄，当产品拆散成单台的方向易控式小坦克使用时，可发挥作用。
- * Our TANDEM trolleys are safe and flexible to transport heavy loads.
- * The CRY series will be provided with a second handlebar to use as well as a single steerable trolley
- * 交货清单中的第二根操纵手柄，是当产品拆散成不相连的一对CRY系列时使用
- * second steering rod part of delivery specification for use as trolley CRY.


型号 Model	CRY-8	CRY-16	CRY-24	CRY-48
承载能力 (t) Load capacity	8	16	24	48
工作高度 (mm) Installation height	110	110	110	140
滚轮参数 (mm) Rollers dimensions	80x70	80x70	80x70	115x60
滚轮数量 Rollers quantity	8	16	24	32
承载面尺寸 (mm) Supporting surface	160	160	160	200
连接杆调节长度 (mm) Spacer rod, adjustable	550-1150	660-1400	660-1700	1800-2100
操作手柄长度 (mm) Steering rod	1000	1400	1400	1400
手柄转向角度 Steering angle	±50	±40	±40	±40
重量 (kg) Tare weight	45	105	156	258

本产品: CRY-8、CRY-16、CRY-24可与组合式Y系列配套组合使用，自由搭配。CRY-48可与BK系列配套组合使用。

This product: CRY-8, CRY-16, CRY-24 can be used in combination with the combination Y series, free collocation. CRY-48 can be combined with BK series.



CRW升降万向搬运小坦克
CRW Lift and Lift Universal Handling Small Tanks

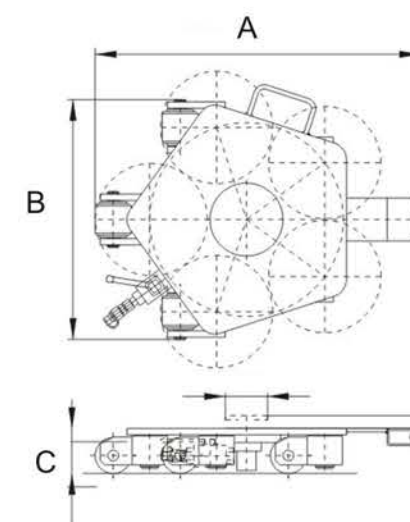


型号 Model number	mm	CRW-3	CRW-5
尺寸 (长×宽×高) (mm) Dimensions (length x width x height)		480x500x125	580x570x125
正常核载量 (T) Normal nuclear load		3T	5T
起升高度 (mm) Lifting height		30mm	30mm
管子长度 (mm) Pipe length		1500mm	1500mm
重量 (KG) Weight (KG)		42	46
轮子材质 Wheel material		PU轮	PU轮

产品特点:


可升降并原地360° 旋转，进退自如！
多台万向小坦克可同时使用。需要时，
可连上操纵手柄（选购附件）使用。
在搬运过程中可将油管拔出，方便操作！

Product characteristics:

It can be lifted and rotated 360 degrees
in situ, advancing and retreating freely!
Several universal small tanks can be used
at the same time. When needed, Can be
connected to the control handle (optional
accessories) for use
In the process of handling, the tubing can
be pulled out for easy operation. Do!

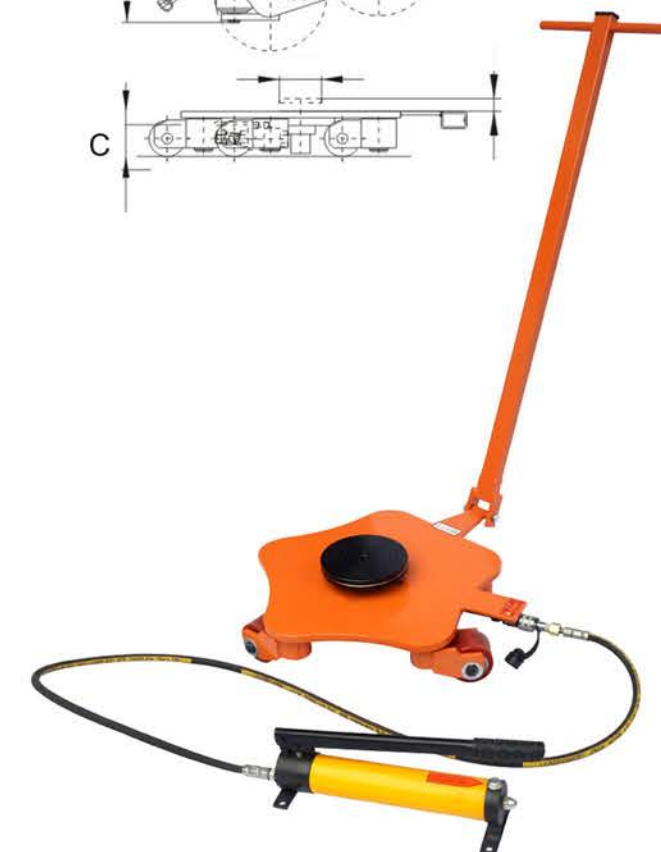

使用示意图
Using the schematic diagram

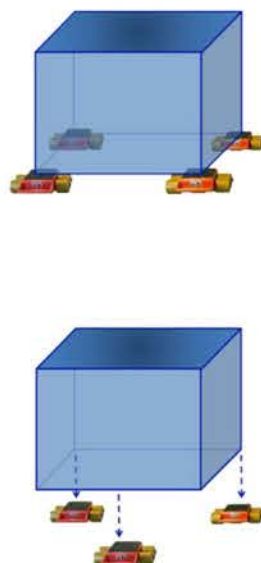

CRV重型搬运小坦克
CRV Heavy Handling Tank

型 号 MODEL	CRV-40	CRV-60	CRV-80	CRV-100	CRV-150	CRV-200
尺寸(长×宽×高) (mm) Dimensions (length x width x height)	590x330x145	730x330x145	590x460x145	730x460x145	730x590x145	870x590x145
正常核载量 (T) Normal nuclear load	40	60	80	100	150	200
轮子数量 Number of wheels	6	8	9	12	16	20
产品重量 (KG) Product weight	100	128	140	180	255	305
轮子材质 Wheel material	合金钢	合金钢	合金钢	合金钢	合金钢	合金钢
轮子尺寸 (mm) Wheel size (mm)	120X100	120X100	120X100	120X100	120X100	120X100

产品特点:

本产品为超重型小坦克，载重量大、超强稳定性，克服其它搬运小坦克无法正常通行的不平地面等优点。


本产品可单台使用也可按设备的支撑点多台同时使用。

可根据客户要求和尺寸定制各类重型搬运小坦克。

Product characteristics:

This product is a heavy small tank with large load and super stability, which overcomes other small tank handling. The advantages of the uneven ground which can not be used normally are as follows. This product can be used alone or at the same time according to the support point of the equipment. We can customize all kinds of heavy handling tanks according to customer requirements and sizes.

使用示意图
Using the schematic diagram

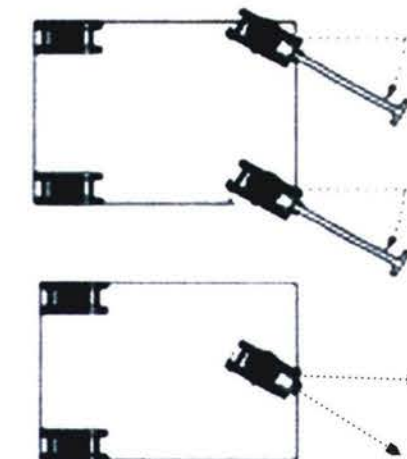

WL重型搬运小坦克
WL Heavy Handling Tank

型 号 MODEL	WL-40	WL-60	WL-100	WL-150	WL-200
尺寸(长×宽×高) (mm) Dimensions (length x width x height)	600x370x145	675x465x145	815x465x145	1095x595x145	1235x595x145
正常核载量 (T) Normal nuclear load	40	60	100	150	200
轮子数量 Number of wheels	6	8	11	16	20
产品重量 (KG) Product weight	112	140	182	282	328
轮子材质 Wheel material	合金钢	合金钢	合金钢	合金钢	合金钢
轮子尺寸 (mm) Wheel size (mm)	120X100	120X100	120X100	120X100	120X100

产品特点:

本产品为超重型小坦克，载重量大、超强稳定性、转向灵活，克服其它搬运小坦克无法正常通行的不平地面等优点。

本产品可单台使用也可按设备的支撑点多台同时使用。

可根据客户要求和尺寸定制各类重型搬运小坦克。

Product characteristics:

This product is a small super heavy tank with large load, super stability, flexible steering, and overcomes other problems. The advantages of carrying small tanks on uneven ground are that they can not pass normally. This product can be used alone or at the same time according to the support point of the equipment. We can customize all kinds of heavy handling tanks according to customer requirements and sizes.

CRE重型搬运小坦克 CRE Heavy Handling Tank



型号 MODEL	CRE-6	CRE-8	CRE-12	CRE-16	CRE-20	CRE-25
尺寸(长×宽×高) (mm) Dimensions (length x width x height)	580X285X135	710X285X135	710X385X135	710X495X135	840X495X135	840X600X135
最大核载量 (T) Maximum nuclear load	18	24	36	48	60	75
正常核载量 (T) Normal nuclear load	15	20	30	40	50	62
轮子数量 (N) Number of wheels	6	8	12	16	20	25
产品重量 (KG) Product weight	53	70	110	135	162	200
轮子材质 (防碎轮) Wheel material (Anti-breaking wheel)	钢芯PU轮	钢芯PU轮	钢芯PU轮	钢芯PU轮	钢芯PU轮	钢芯PU轮
轮子尺寸 (mm) Wheel size (mm)	110X85	110X85	110X85	110X85	110X85	110X85


产品特点:

本产品为重型小坦克, 有效保护地面、静音、载重量大、超强稳定性, 克服其它搬运小坦克无法正常通行的不平地面等优点。
本产品可单台使用也可按设备的支撑点多台同时使用。
可根据客户要求和尺寸定制各类重型搬运小坦克。

Product characteristics:

This product is a small heavy tank, which can effectively protect the ground, silence, heavy load and super stability. The advantages of overcoming the uneven ground that other small tanks can't pass normally are overcome. This product can be used alone or at the same time according to the support point of the equipment. We can customize all kinds of heavy handling tanks according to customer requirements and sizes.

货柜钻板夹 Container drill clamp

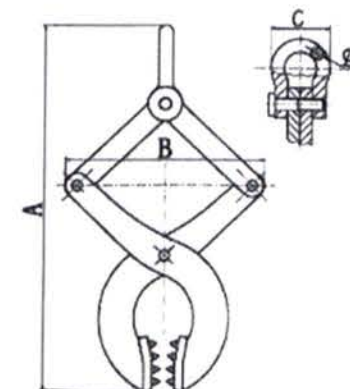

产品特点



适用于各类木质、货柜、托盘、木材等, 方便灵活。

Product characteristics

It is suitable for all kinds of wood, containers, pallets, timber, etc. It is convenient and flexible.

型号 Model		VK-1	VK-2	VK-3
额定载荷 Rated load	KG	1000	2000	3000
适用工字钢宽度 For beam width	MM	30-100	30-180	30-200
尺寸(mm) Dimensions (mm)	A	250-410	360-510	390-670
	B	230-290	340-390	320-450
	C	75	90	102
	D	16	20	22
净重 Net weight	KG	6	9.5	14

撬棒 JO系列 Lever rod JO series

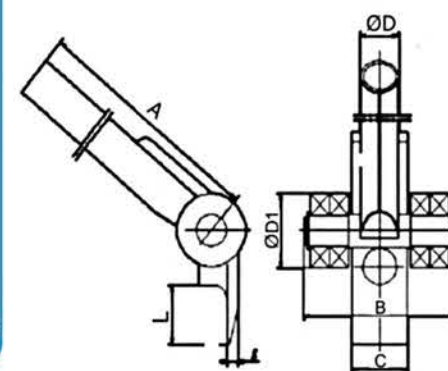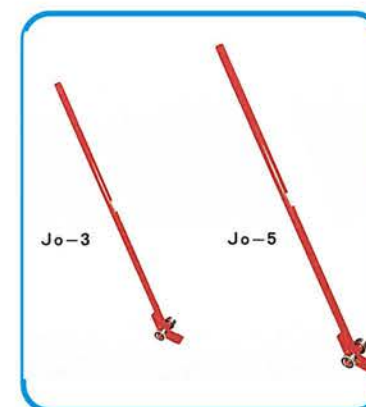

型号 Model		JO-3T	JO-5T
额定载荷 Rated load	t	3	5
尺寸(mm) Dimensions (mm)	A	1370	1520
	B	160	175
	C	65	75
	D	34	38
	L	50	60
	D1	62	72
	1	10	12
净重 Net weight	KG	7	10

产品特点:

本产品是搬运小坦克及其它搬运工具的辅助工具, 具有结构简单、操作方便等优点。

Product characteristics:


This product is an auxiliary tool for handling small tanks and other handling tools. It has the advantages of simple structure and easy operation.

CH搬运小坦克
CH Handling Small Tanks

滑鞋小坦克CH-1.5T
Shoe Slipper Tank CH-1.5T



两轮CH-2.5T
Two rounds of CH-2.5T

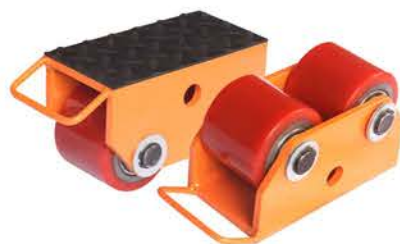

重型两轮CH-3T
Heavy duty two-wheel CH-3T



型号 MODEL	CH-1.5T	CH-2.5T	CH-3T
尺寸(长×宽×高) (mm) Dimensions (length x width x height)	195x195x55	180x100x110	320x120x110
最大核载量 (T) Maximum nuclear load	1.5	2.5	3
轮子数量 (N) Number of wheels	8	2	2
产品重量 (KG) Product weight	4	5	6
轮子材质与尺寸 (mm) Wheel Material and Size (mm)	钢轮47X16	PU轮80X70	PU轮80X90

轮子的革命


每一个JNDO滚轮均由最新的高科技特殊材料聚酰胺/聚亚胺脂(polymide/poly rethane)经高温高压聚合而成,并装有双滚珠轴承或滑动轴承,使之保证最大的稳定性转动性,并使您的地面免受损坏。

所有凯力滚轮出厂前均通过以下测试

- 加载情况下抵抗力测试
- 抗疲劳测试
- 抗冲击测试

以上载重搬运车装有带摩擦轴承的滚轮所有型号产品都可按客户要求换成硫化滚轮或钢制滚轮。

Each JNDO rollers by the latest high-techSpecial materials polyamide / poly (polymide/polyRethane) by high temperature and high pressure polymerization, and is equipped with double rollBead bearing or sliding bearing, so as to ensure maximum stability.Rotate and keep your ground from damage.All Kaili roller factory are all through the following testsResistance test under loadAnti fatigue testImpact resistance test, above the load carrying vehicle equipped with friction bearing rollerAll types of products can be replaced by customer's requirements for vulcanized orSteel roller.

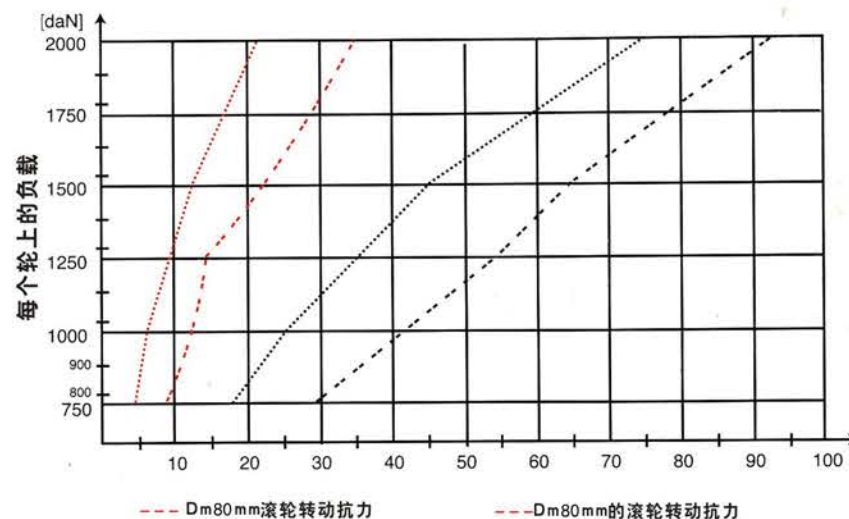

Rotation resistance of the roller of the Dm80mm Dm80mm

JNDO特殊材料的滚轮在启动抗力和转动抗力上与聚酰胺滚轮的比较。

JNDO special materials in starting resistance and anti rotation wheel Comparison between force and polyamide roller.

各类搬运车轮、小坦克车轮等型号和配件齐全。

All kinds of transport wheels, small tanks and other models and accessories complete



高强度双向小坦克
可直行、转向等方便安全可靠

High strength two way small tankCan be straight, steering, and other convenient safe and reliable



K系列搬运工具

适用于宽度不够或者空间狭小的地方,使用可根据工作环境更改各种轮子。

K series moving tools

Applicable to the width of the space is not enough or small, the use of the work environment to change a variety of wheels.



直行防滑搬运小坦克

Straight line of small tanks




超低搬运小坦克

Ultra low handling small tanks



双向转向搬运小坦克

two-way steering handling small tanks

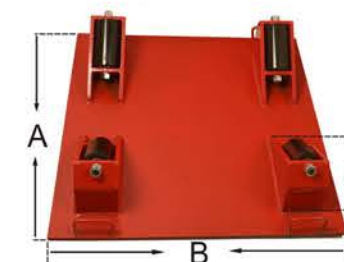

管道牵引车
Pipeline tractor

适用于各类下水管道、圆柱体电缆等在外没有动力牵引和人员不足的情况下使用本产品移动重物,可多台一起使用。

Suitable for all kinds of sewer pipes, cylindrical cables, etc. outsideUse the product without power traction and shortage of personnelThe product can move heavy objects, and can be used together by multiple units.



CA系列搬运小坦克适用于
各类圆钢、管道等圆柱体搬运小坦克

Ca series of small tanks used inAll kinds of round steel pipe, cylinder handling of small tanks

根据各种不同工作环境物体提升和移动,凯力为您量身定做简单易行的方案。

According to the different working environment of lifting and moving objects, Kaili tailored simple solution for you.